


Heat development during the ABS brake process

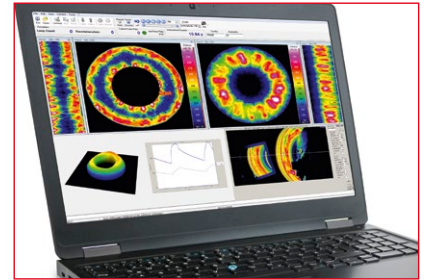

Software IRBIS® 3 rotate for rotation test bench

# ImageIR® 5300

High-speed Thermography Camera with Large Pitch

**320  
x  
256**  
Detector

**Detector Format**  
Large detector enables  
highest sensitivity

**105 kHz**

**IR-Frame Rate**  
Analysis of extreme temperature  
changes and gradients

**±1  
%**

**Measurement Accuracy**  
Highly accurate and  
repeatable measurements

**≤ 15  
mK**

**Thermal Resolution**  
Precise detection of smallest  
temperature differences

**T<sub>int</sub>**

**Shortest Integration Time**  
Accurate temperature measurements  
of fast processes

**30 µm  
Pitch**

**Pitch Dimension**  
Precise measurement of low temperatures  
and very fast integration times

**GigE**

**GigE Vision Compatible**  
Standard interface for easy integration  
into existing process environment

The ImageIR® 5300 has been designed specifically for capturing and recording extremely fast running thermal processes. The MWIR focal-plane array photon detector in the format of (320 × 256) IR pixels allows users to capture thermal images in full frame at frequencies up to 481 Hz. When using the sub frame mode, the value even increases to 105,000 Hz.

The ImageIR® 5300 demonstrates the strength of its design as an integral part of the automated IR rotation test bench solution Thermal Rotate Check (TRC) from InfraTec. This allows rapidly rotating components, such as tyres, brakes and clutches, to be analysed precisely. The results provide information on how well the test objects withstand continuous operation, which signs of wear are present and how serious they are.

The potential of the camera goes far beyond such applications in automotive and rail technology. Thanks to its extensive single pixels (detector pitch 30 µm) the ImageIR® 5300 achieves an outstanding thermal resolution better than 0.015 K. Modularly designed with an optics, detector and interface module and equipped with an integrated trigger interface, the camera proves itself to be a versatile measuring and testing instrument for applications in industry and science.

## Technical Specifications

Spectral range	(3.7 ... 4.8) $\mu\text{m}$
Pitch	30 $\mu\text{m}$
Detector	MCT
Detector format (IR pixels)	(320 $\times$ 256)
Image acquisition	Snapshot
Readout mode	ITR
Aperture ratio	f/2.0
Detector cooling	Stirling cooler
Temperature measuring range	(-40 ... 1,200) $^{\circ}\text{C}$ , up to 3,000 $^{\circ}\text{C}^*$
Measurement accuracy	$\pm 1^{\circ}\text{C}$ or $\pm 1\%$
Temperature resolution @ 30 $^{\circ}\text{C}$	Better than 0.015 K
Frame rate (full / half / quarter / sub frame)*	Up to 481 / 1,906 / 7,229 / 105,000 Hz
Window mode	Yes
Focus	Manual, motorised or automatically*
Dynamic range	Up to 16 bit*
Integration time	(1 ... 20,000) $\mu\text{s}$
Rotating filter wheel*	Up to 5 positions
Rotating aperture wheel*	Up to 5 positions
Interfaces	GigE, HDMI*
Trigger	4 IN / 2 OUT, TTL
Analogue signals*, IRIG-B*	2 IN / 2 OUT, yes
Tripod adapter	1/4" and 3/8" photo thread, 2 $\times$ M5
Power supply	24 V DC, wide-range power supply (100 ... 240) V AC
Storage and operation temperature	(-40 ... 70) $^{\circ}\text{C}$ , (-20 ... 50) $^{\circ}\text{C}$
Protection degree	IP54, IEC 60529
Dimensions; weight	(241 $\times$ 120 $\times$ 160) mm*; 3.3 kg (without lens)
Further functions	Multi Integration Time*
Analysis and evaluation software	IRBIS <sup>®</sup> 3, IRBIS <sup>®</sup> 3 view, IRBIS <sup>®</sup> 3 rotate, IRBIS <sup>®</sup> 3 plus*, IRBIS <sup>®</sup> 3 professional*, IRBIS <sup>®</sup> 3 control*, IRBIS <sup>®</sup> 3 online*, IRBIS <sup>®</sup> 3 process*, IRBIS <sup>®</sup> 3 active*, IRBIS <sup>®</sup> 3 mosaic*, IRBIS <sup>®</sup> 3 vision*

\* Depending on model

Lenses	Focal length (mm)	FOV ( $^{\circ}$ )	IFOV (mrad)
Wide-angle lens	12	(43.6 $\times$ 35.5)	2.5
Standard lens	25	(21.7 $\times$ 17.5)	1.2
Telephoto lens	50	(11.0 $\times$ 8.8)	0.6
Telephoto lens	100	(5.5 $\times$ 4.4)	0.3
Telephoto lens	200	(2.7 $\times$ 2.2)	0.15

Macro and microscopic lenses	Object distance (mm)	Object size (mm)	Pixel size ( $\mu\text{m}$ )
Close-up for telephoto lens 50 mm	300	(58 $\times$ 46)	180
Close-up for telephoto lens 100 mm	500	(48 $\times$ 38)	150
Microscopic lens M=1.0 $\times$ (2 versions)	195 / 300	(9.6 $\times$ 7.7)	30
Microscopic lens M=3.0 $\times$	22	(3.2 $\times$ 2.6)	10

© InfraTec 04 / 2021 – All stated product names and trademarks remain in property of their respective owners. Design, specification and technical progress subject to change without prior notice.



### Headquarters

InfraTec GmbH  
Infrarotsensorik und Messtechnik  
Gostritzer Straße 61 – 63  
01217 Dresden / GERMANY

Phone +49 351 82876-610  
Fax +49 351 82876-543  
E-mail [thermo@InfraTec.de](mailto:thermo@InfraTec.de)  
[www.InfraTec.eu](http://www.InfraTec.eu)

### USA office

InfraTec infrared LLC  
5048 Tennyson Pkwy.  
Plano TX 75024 / USA

Phone +1 844-226-3722 (toll free)  
E-mail [thermo@InfraTec-infrared.com](mailto:thermo@InfraTec-infrared.com)  
[www.InfraTec-infrared.com](http://www.InfraTec-infrared.com)