




Software IRBIS® 3

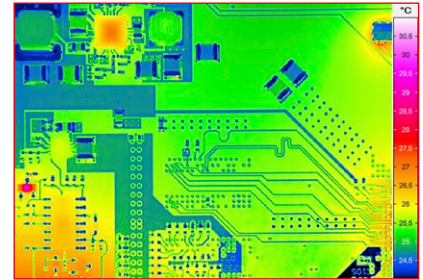

Circuit board

ImageIR® 7300

High-end Thermography Camera – Entry into the VGA Segment

**640
x
512**
Detector

Detector Format
Large detector enables
highest sensitivity

**640
x
512**
100 Hz

IR-Frame Rate
Analysis of extreme temperature
changes and gradients in full frame

**±2
%**

Measurement Accuracy
Highly accurate and
repeatable measurements

**≤ 20
mK**

Thermal Resolution
Precise detection of smallest
temperature differences

GigE

GigE Vision Compatible
Standard interface for easy integration
into existing process environment



Rotating Filter Wheel and Aperture Wheel
Enables measurement tasks with high object
temperatures and spectral thermography




Motor Focus
Precise, fast and remotely controlled;
including multiple autofocus functions

Those, who are looking for a powerful thermographic camera to solve demanding measurement and testing tasks in the fields of industry and science, that offers an impressive geometrical resolution will find the ImageIR® 7300 a perfect match. Its cooled focal-plane array photon detector (snapshot) provides (640 x 512) IR pixels and a pitch of 15 µm. In addition, you can choose between MCT and InSb detectors.

The camera supports fast storing frame rates with frequencies up to 1,200Hz. An internal trigger interface guarantees for precise, repeatable triggering of correspondingly fast processes. Two respective inputs and outputs are used to control the camera or to generate digital control signals for external devices. Depending on the character of the measurement and testing situation due to its modular design, most diverse thermographic software and high-quality lenses the ImageIR® 7300 is quite easy to adapt to the on-site conditions.

Technical Specifications

Spectral range	MCT: (1.5 ... 5.5) μm InSb: (1.5 ... 5.7) μm
Pitch	15 μm
Detector	MCT or InSb
Detector format (IR pixels)	(640 \times 512)
Image acquisition	Snapshot
Readout mode	ITR / IWR
Aperture ratio	f/3.0 or f/2.0
Detector cooling	Stirling cooler
Temperature measuring range	(-40 ... 300) $^{\circ}\text{C}$, up to 3,000 $^{\circ}\text{C}^*$
Measurement accuracy	$\pm 2^{\circ}\text{C}$ or $\pm 2\%$
Temperature resolution @ 30 $^{\circ}\text{C}$	MCT: Better than 0.02 K InSb: Better than 0.025 K
Frame rate (full / half / sub frame)*	MCT: Up to 75 / 300 / 1,200 Hz InSb: Up to 100 / 326 / 863 Hz
Window mode	Yes* (full frame / sub frame)
Focus	Manual
Dynamic range	14 bit
Integration time	(1 ... 20,000) μs
Rotating filter wheel*	Up to 6 positions
Rotating aperture wheel*	Up to 5 positions
Interfaces	GigE, HDMI*
Trigger	2 IN / 2 OUT, TTL
Analogue signals*, IRIG-B*	2 IN / 2 OUT, no
Tripod adapter	1/4" and 3/8" photo thread, 2 \times M5
Power supply	24 V DC, wide-range power supply (100 ... 240) V AC
Storage and operation temperature	(-40 ... 70) $^{\circ}\text{C}$, (-20 ... 50) $^{\circ}\text{C}$
Protection degree	IP54, IEC 60529
Dimensions; weight	MCT: (241 \times 120 \times 160) mm* InSb: (235 \times 120 \times 160) mm* 3.3 kg (without lens)
Analysis and evaluation software	IRBIS [®] 3, IRBIS [®] 3 view, IRBIS [®] 3 plus*, IRBIS [®] 3 professional*, IRBIS [®] 3 control*, IRBIS [®] 3 online*, IRBIS [®] 3 process*, IRBIS [®] 3 active*, IRBIS [®] 3 mosaic*, IRBIS [®] 3 vision*

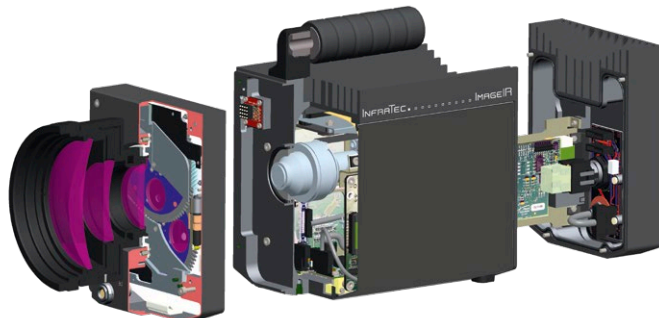

* Depending on model

Lenses	Focal length (mm)	FOV ($^{\circ}$)	IFOV (mrad)
Wide-angle lens	12	(43.6 \times 35.5)	1.3
Standard lens	25	(21.7 \times 17.5)	0.6
Telephoto lens	50	(11.0 \times 8.8)	0.3
Telephoto lens	100	(5.5 \times 4.4)	0.15
Telephoto lens	200	(2.7 \times 2.2)	0.08

Macro and microscopic lenses	Minimum object distance (mm)	Object size (mm)	Pixel size (μm)
Close-up for telephoto lens 50 mm	300	(58 \times 46)	90
Close-up for telephoto lens 100 mm	500	(48 \times 38)	75
Microscopic lens M = 1.0 \times (3 versions)	40 / 195 / 300	(9.6 \times 7.7)	15
Microscopic lens M = 3.0 \times	22	(3.2 \times 2.6)	5
Microscopic lens M = 8.0 \times	14	(1.2 \times 1.0)	1.9

© InfraTec 04 / 2021 – All stated product names and trademarks remain in property of their respective owners. Design, specification and technical progress subject to change without prior notice.



Headquarters

InfraTec GmbH
Infrarotsensorik und Messtechnik
Gostritzer Straße 61 – 63
01217 Dresden / GERMANY

Phone +49 351 82876-610
Fax +49 351 82876-543
E-mail thermo@InfraTec.de
www.InfraTec.eu

USA office

InfraTec infrared LLC
5048 Tennyson Pkwy.
Plano TX 75024 / USA

Phone +1 844-226-3722 (toll free)
E-mail thermo@InfraTec-infrared.com
www.InfraTec-infrared.com